


GROUND FLOOR/ MAIN BUILDING

A

B

C

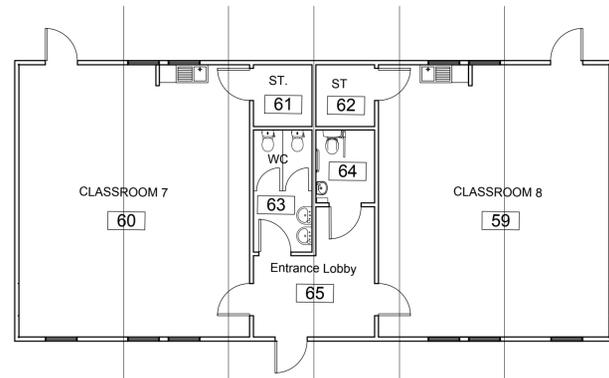

MOBILE CLASSROOMS

KEY:

- CARPET HECKMONDWIKE - PEBBLE
- CLEAN OFF CARPET ARIZONA 11 - 80 CHOCOLATE
- RUBBER - NORAMENT GRANO - 5332
- RUBBER TO RAMPS - NORMENT GRANO - 5329 (FOR SCHOOL LOGO SEE PROV.SUMS)
- NON-SLIP VINYL - ALTRO SUPREMA - CALICO
- ALTRO STRONGHOLD - DOLPHIN - K3010
- ALTRO MARINE - CASCADE - WR105

NOTES:

D Colour choices amended for rubber flooring ED 05/21

C Areas altered to accommodate School request and amendments relating to RFIs 42 & 49 also RFQ 28 i.e. relocated shower, toilet layout amendments and revisions to nursery entrance area from corridor. Revision clouds to amended areas. ML 05/21

B Colour choices added to key ED 04/21

A Alterations to amount of flooring and note on latex / dpm. ML 03/20

A Removal of LRC extension and Hall Partition Alteration to openings between Rooms 48, 49 and 51 ML 11/19

REV.	DESCRIPTION	BY	DATE

PEMBROKESHIRE COUNTY COUNCIL
CYNGOR SIR PENFRO

Darren Thomas MBA, B.Eng.(Hons), C.Eng, M.I.C.E, M.I.Struct.E
 Penarth, Porthcawl & Adlewaldd, Head of Highways & Construction,
 Pembrokeshire County Council,
 County Hall, HAVERFORDWEST,
 Pembrokeshire, SA61 1TP
 Tel: 01437 764551
 www.pembrokeshire.gov.uk

PROJECT TITLE		YSGOL WALDO WILLIAMS	
DRAWING TITLE		FLOOR FINISHES	
SCALE	DRAWN BY	CHECKED	DATE
1/100	JML	JML	04/18
PROJECT PHASE	DRAWING NO.		
Construction	CA4651/GA31D		

NOTES:

LATEX SCREED REQUIRED TO SEAL ALL AREAS WHERE PVC TILES HAVE BEEN REMOVED

LIQUID DPM TO BE INSTALLED UNDER ALL NEW VINYL AREAS WHERE EXISTING TILES HAVE BEEN REMOVED